

FIG. 1

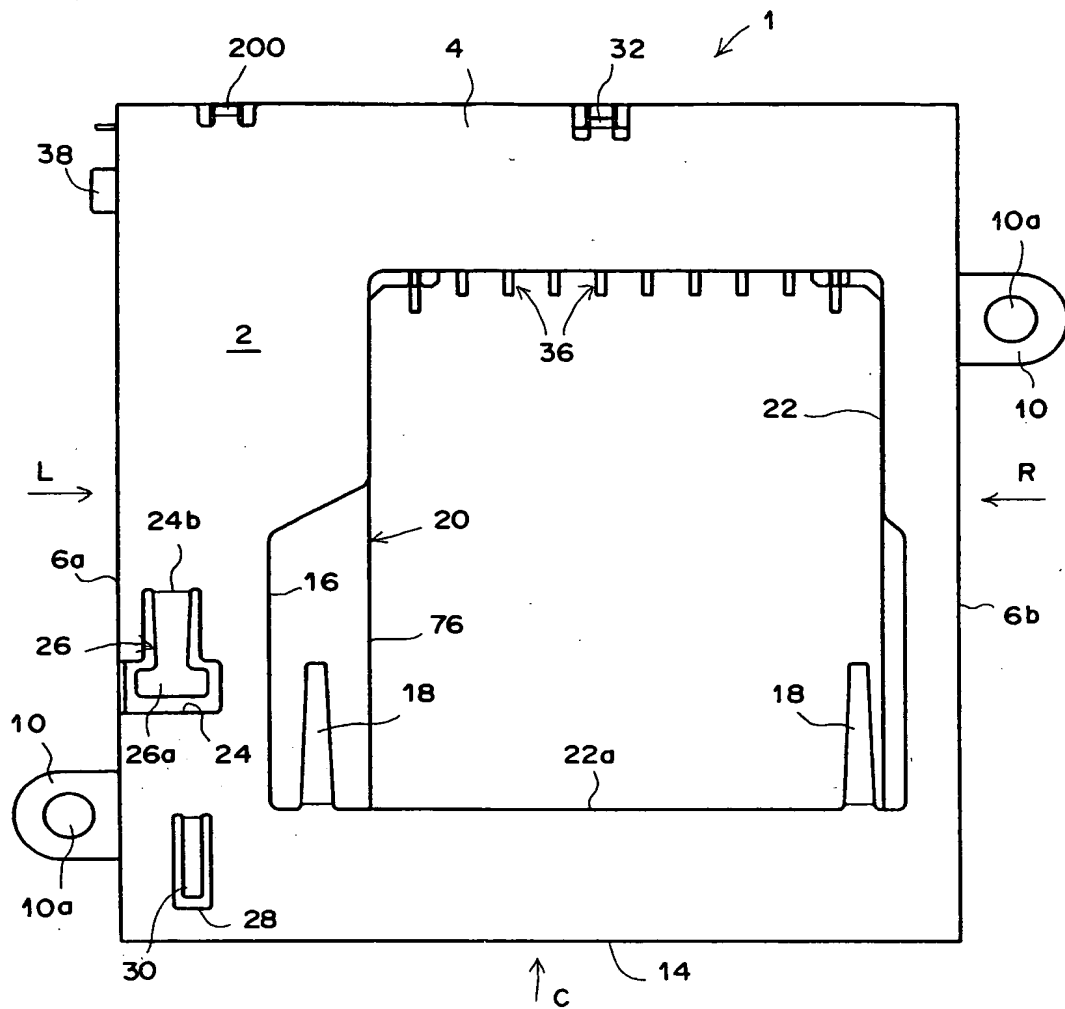


FIG. 2

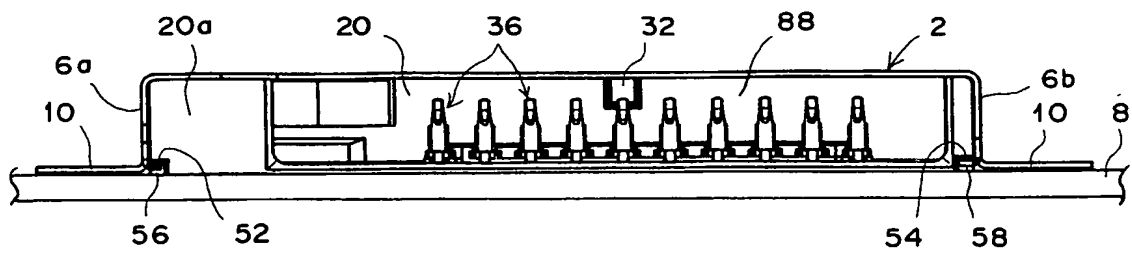


FIG. 3

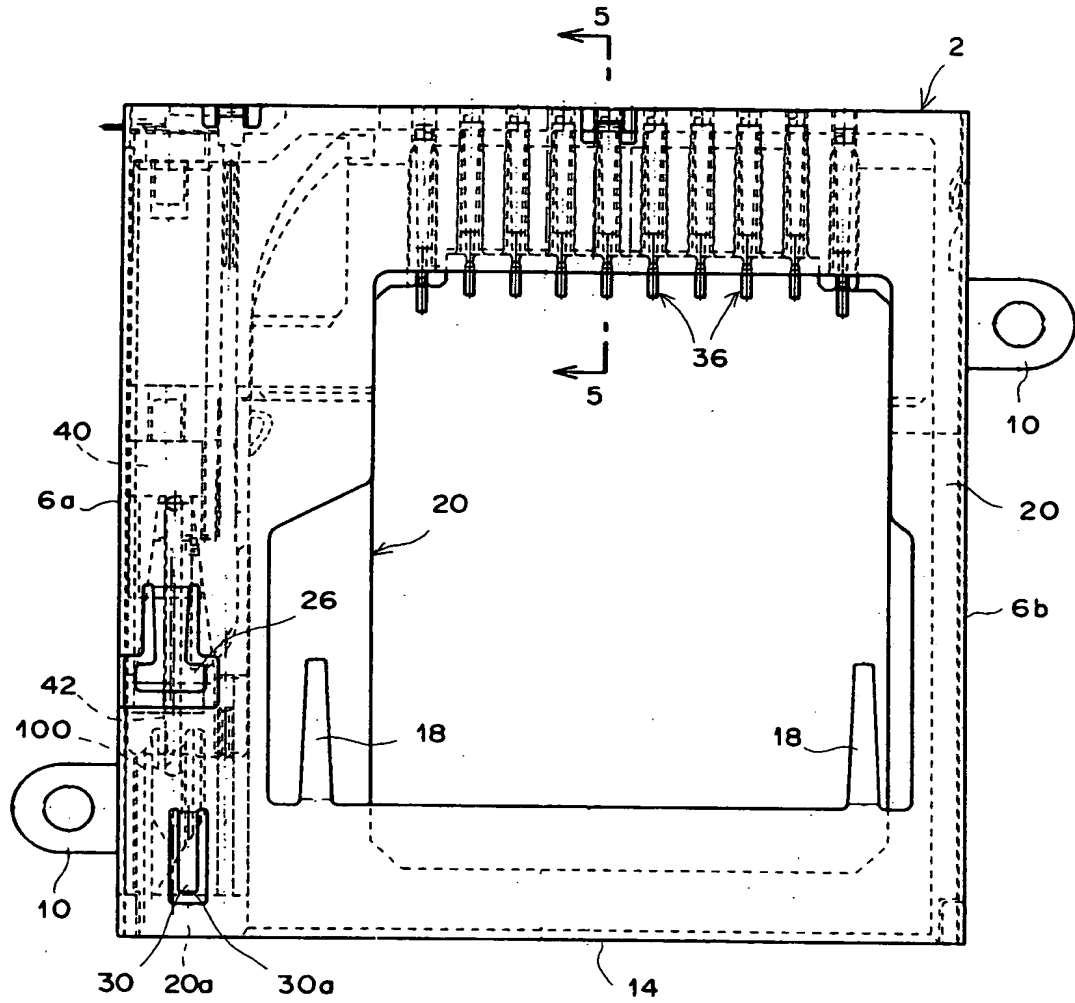


FIG. 4A


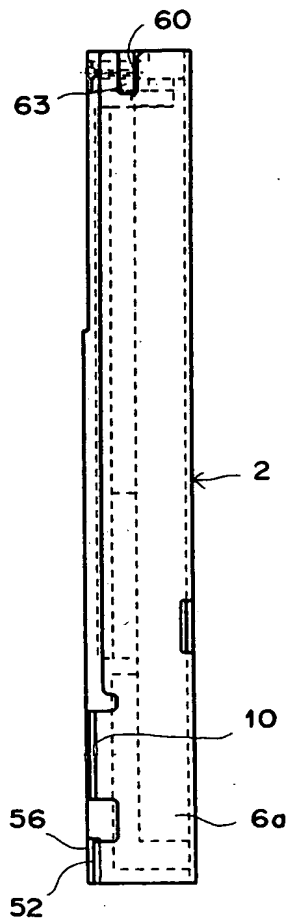


FIG. 4B

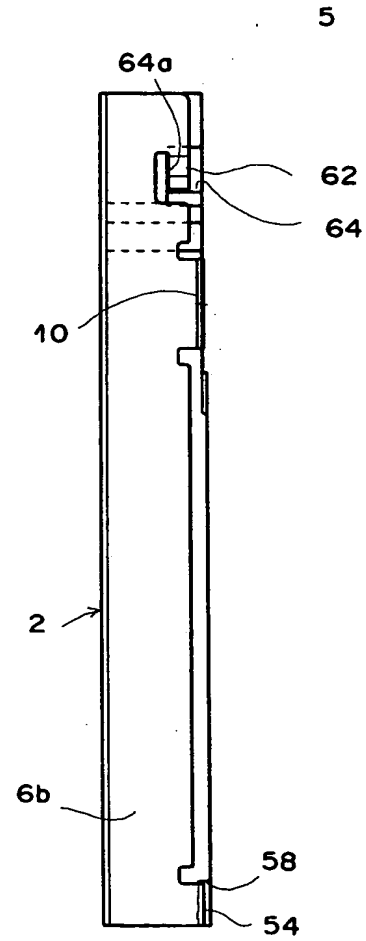

F I G . 5

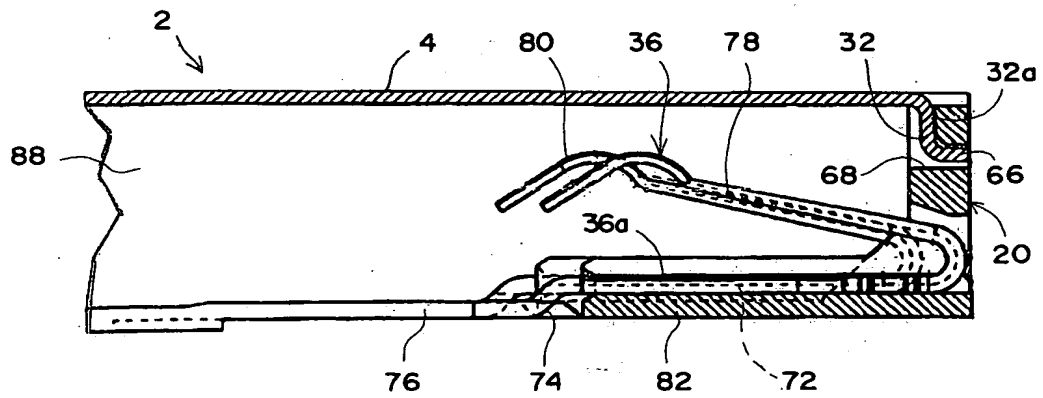


FIG. 6

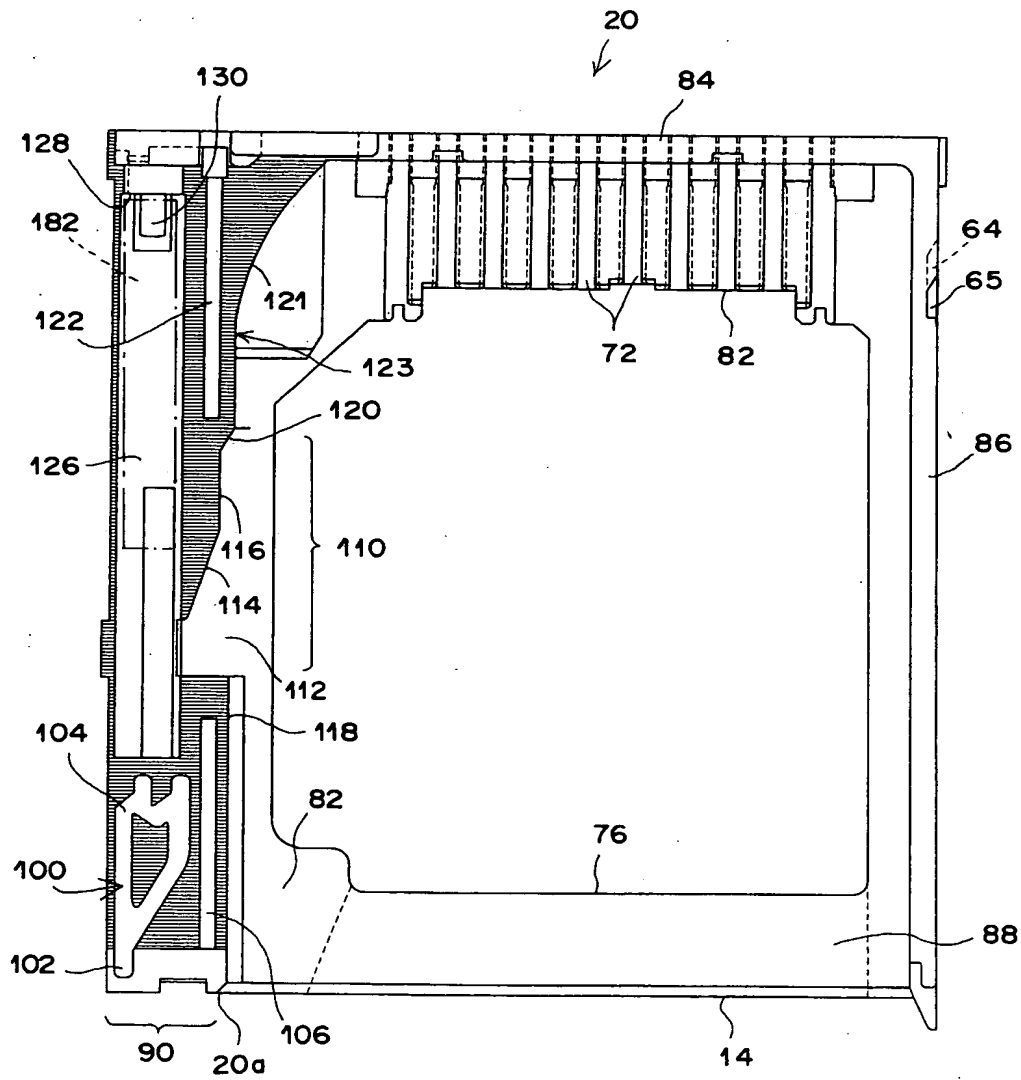


FIG. 7A


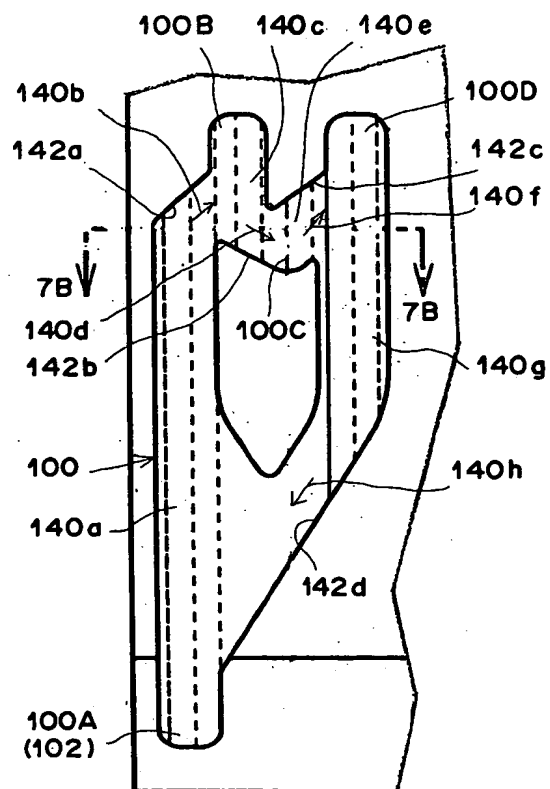


FIG. 7B

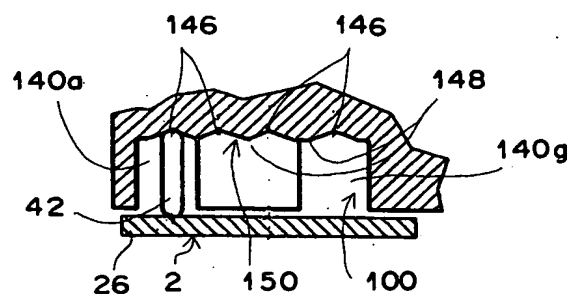


[illegible]


FIG. 1 is a perspective view of a device 40 in a first position. The device includes a main body 190, a first end 192, and a second end 190. A component 176 is mounted on the main body, with a sub-component 177. A component 189 is also shown. A Z-axis arrow indicates the direction of movement.

[illegible]


୧-୬

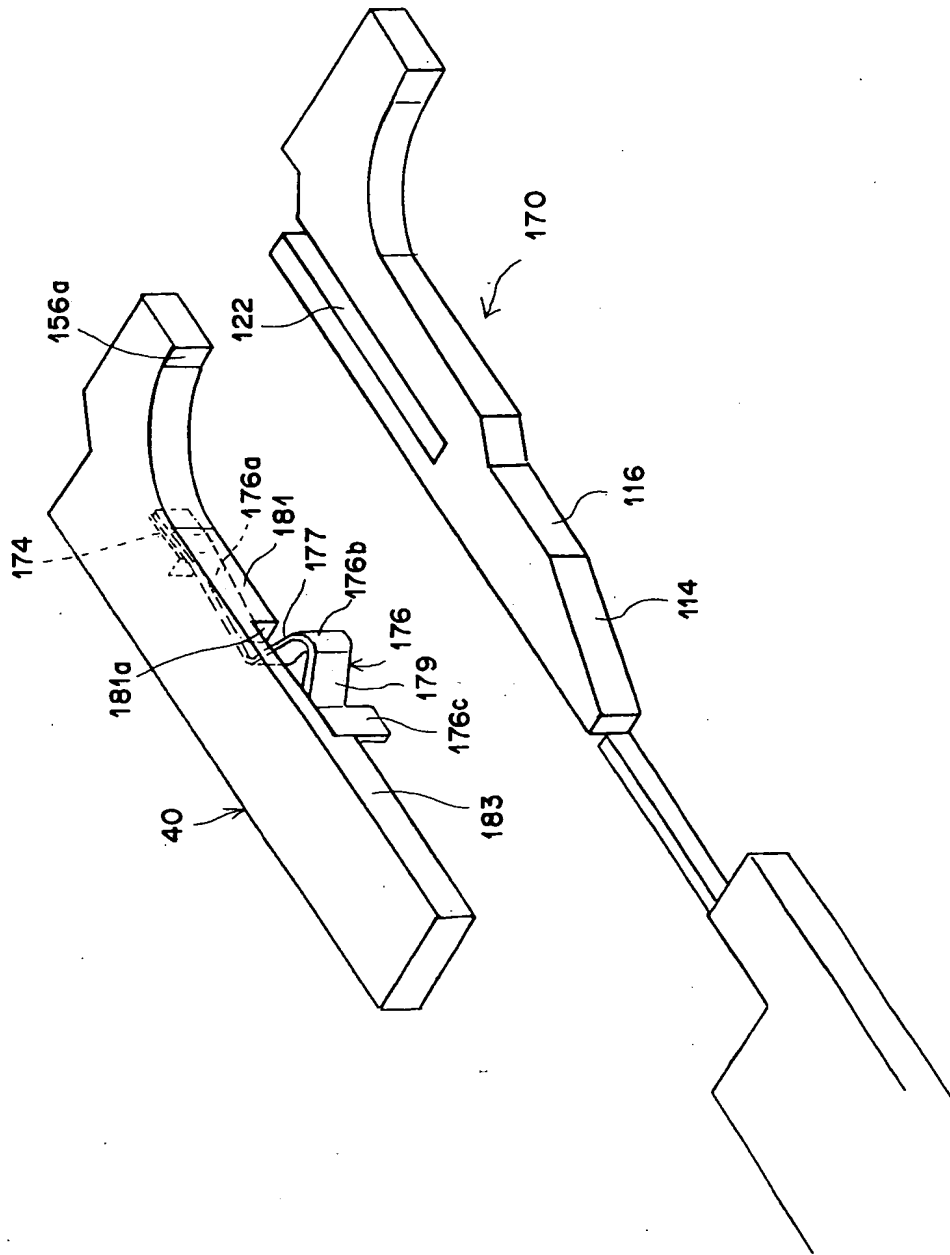

F I G . 10

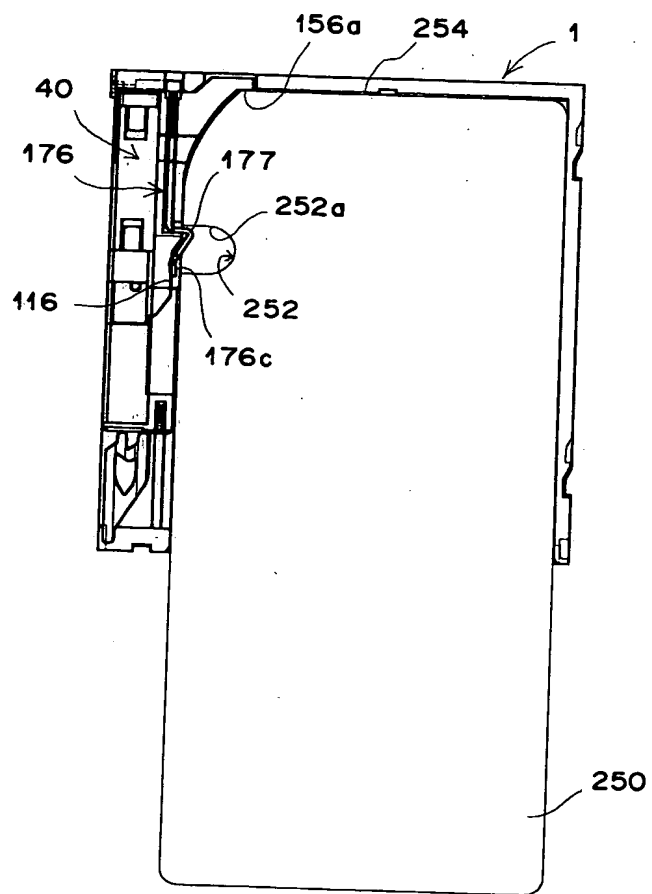

F I G. 11

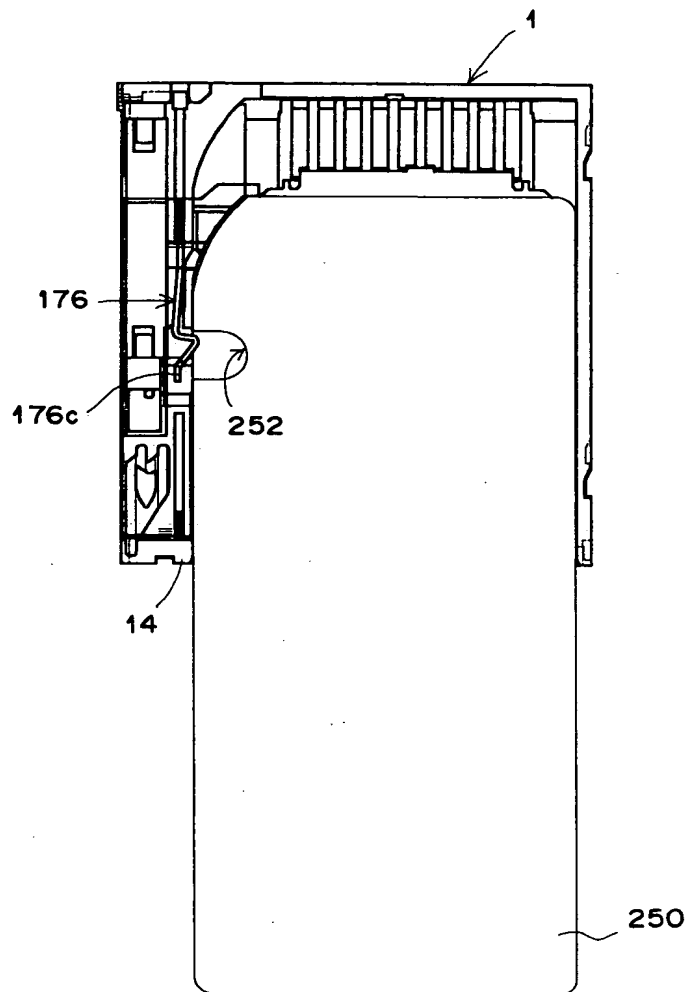

F I G .12

